



瑞卓电子有限公司  
REOMAX ELECTRONICS CO., LTD

Version No.:2013001

Spec. No.: SFA-RFP

## 规格承认书

## Specification for approval

产品名称: RFP 系列 4.0\*12mm 超小型 快断型 保险丝

**Product Type: RFP Series 4.0\*12mm Fast-Acting PICO Fuse**

苏州鼎时电子科技有限公司  
Sushou Dingshi Electronic Technology Co., LTD

电话: +86-512-67327876 传真: +86-512-62902629

厂址: 苏州市东吴北路 223 号惠康商务大厦

网址: <http://www.dsfuse.com>

苏州鼎时电子科技有限公司

Sushou Dingshi Electronic Technology Co., LTD

Add: Suzhou Dongwu North Road No.223HuiKang

Business Building

Web: <http://www.dsfuse.com>





## 目录 Contents

1. 适用范围 / Scope of Application.....	3
2. 安规认证标准及编号 / Standards and Agency Approvals.....	3
3. 产品标示 / Product Marking.....	4
4. 外观及形状 / Appearances and Configuration.....	5
5. 结构及尺寸 / Dimensions and Structure.....	6
6. 材料明细 / Material Details.....	6
7. 产品特性 / Product Characteristics.....	6
8. 电气特性 / Electrical Characteristics.....	7
9. 环境特性 / Environmental Characteristic.....	8
10. 安装建议 / Installation Recommendations.....	9
11. 包装 / Packaging.....	9
12. 其他 / Others.....	10
附件 I: 安规证书 / Appendix I: Safety approval certificates.....	11



## 1. 适用范围 / Scope of Application

本产品适用于各类电子设备电路的过流保护作用，广泛应用于照明设备、电源设备以及适配器等领域。

This product is suitable for various kinds of electronic devices' circuit over current protection. Widely used in industrial of Lighting, Power supply and Adapter applications, etc.

## 2. 安规认证标准及编号 / Standards and Agency Approvals

2.1 执行标准：遵循 UL 248 -1 / -14。

Standards: In accordance with UL 248 -1 / -14.

2.2 认证范围 Certification:

额定电压 Voltage Rating	安规标准 Agency	认证范围 Ampere Range	证书编号 Agency File Number
350V	UL	100mA ~ 10A	E340427(JDYX2)
	C-UL	100mA ~ 10A	E340427(JDYX8)
	PSE	100mA ~ 10A	Pending
	KTL	100mA ~ 10A	Pending

2.3 目录编号 Catalogue No., ● 已认证 Approved / ○ 认证中 Pending

目录编号 Catalog No.	额定电流 Ampere Rating	额定电压 Voltage Rating	分断能力 Breaking Capacity	安规认证 Agency Approvals		
RFP0100	100mA	350V	50A@350VAC	●	●	○
RFP0125	125mA	350V	50A@350VAC	●	●	○
RFP0160	160mA	350V	50A@350VAC	●	●	○
RFP0200	200mA	350V	50A@350VAC	●	●	○
RFP0250	250mA	350V	50A@350VAC	●	●	○
RFP0300	300mA	350V	50A@350VAC	●	●	○
RFP0315	315mA	350V	50A@350VAC	●	●	○
RFP0350	350mA	350V	50A@350VAC	●	●	○



RFP0375	375mA	350V	50A@350VAC	●	●	○
RFP0400	400mA	350V	50A@350VAC	●	●	○
RFP0500	500mA	350V	50A@350VAC	●	●	○
RFP0600	600mA	350V	50A@350VAC	●	●	○
RFP0630	630mA	350V	50A@350VAC	●	●	○
RFP0700	700mA	350V	50A@350VAC	●	●	○
RFP0750	750mA	350V	50A@350VAC	●	●	○
RFP0800	800mA	350V	50A@350VAC	●	●	○
RFP1100	1A	350V	50A@350VAC	●	●	○
RFP1125	1.25A	350V	50A@350VAC	●	●	○
RFP1150	1.5A	350V	50A@350VAC	●	●	○
RFP1160	1.6A	350V	50A@350VAC	●	●	○
RFP1200	2A	350V	50A@350VAC	●	●	○
RFP1250	2.5A	350V	50A@350VAC	●	●	○
RFP1300	3A	350V	50A@350VAC	●	●	○
RFP1315	3.15A	350V	50A@350VAC	●	●	○
RFP1350	3.5A	350V	50A@350VAC	●	●	○
RFP1400	4A	350V	50A@350VAC	●	●	○
RFP1500	5A	350V	50A@350VAC	●	●	○
RFP1600	6A	350V	50A@350VAC	●	●	○
RFP1630	6.3A	350V	50A@350VAC	●	●	○
RFP1700	7A	350V	50A@350VAC	●	●	○
RFP1800	8A	350V	50A@350VAC	●	●	○
RFP1900	9A	350V	50A@350VAC	●	●	○
RFP2100	10A	350V	50A@350VAC	●	●	○
RFP2120	12A	350V	50A@350VAC	○	○	○
RFP2150	15A	350V	50A@350VAC	○	○	○

### 3. 产品标示 / Product Marking

保险丝管体上需有下列标示。

The fuses body shall have the following markings.



示例 Example:

	<b>RFP</b>	<b>F</b>	<b>1A</b>	<b>350V</b>	
①	②	③	④	⑤	⑥

①	制造厂商标识/Reomax Trade Mark:
②	系列型号名称/Series Type Name: <b>RFP</b>
③	电器特性符号/ Electrical Characteristic symbol: <b>F</b> (快断型保险丝符号 / symbol for Fast-Acting)
④	额定电流/Rated Current (A): ___A 或 or ___mA
⑤	额定电压/Rated Voltage (V): <b>350V</b>
⑥	认证符号/ Approval Marks:



**注意 / Note:** 对于标示的大小和位置没有规定。

*Size and position of the markings shall not be provided.*

#### 4. 外观及形状 / Appearances and Configuration

4.1 外观不应出现显著的污点、裂纹，标识应该容易辨识。

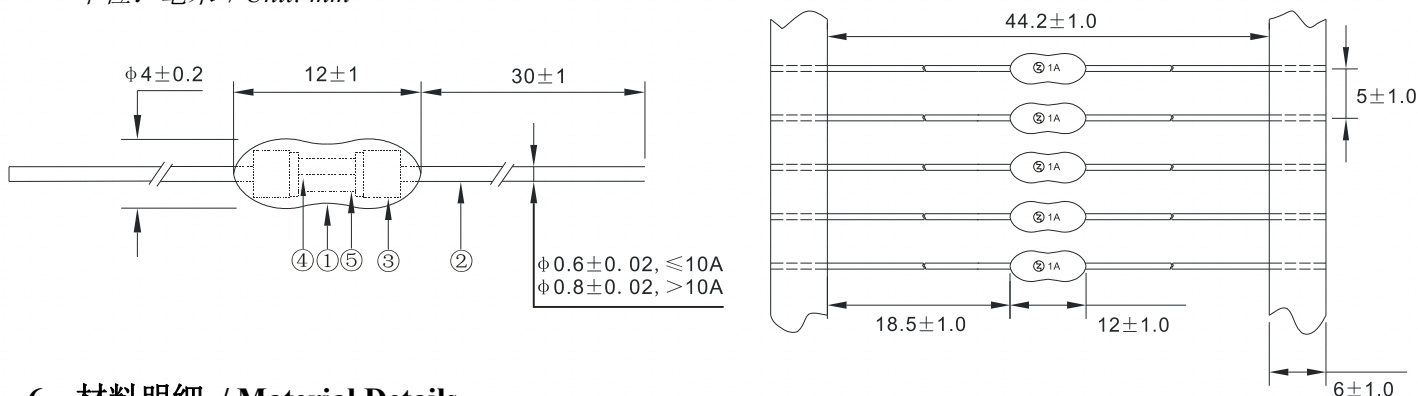
There shall not be any remarkable stain and crack on the appearances, markings shall be easily legible.

4.2 形状：带直线引脚超小型保险丝。

Configuration: Axial Leaded Pico Fuse.

## 5. 结构及尺寸 / Dimensions and Structure

单位: 毫米 / Unit: mm



## 6. 材料明细 / Material Details

编号 NO.	零件名称 Part Name	材质 Material
①	环氧涂层 Body Encapsulated	环氧树脂 Epoxy Coated
②	引线 Lead wire	镀锡铜线 Tin Plated Copper
③	铜帽 Cap	黄铜镀镍 Nickel Plated Brass
④	熔丝 Fuse element	合金 Alloy wire
⑤	陶瓷管 Body	陶瓷 Non-Transparent Ceramic Tube

## 7. 产品特性 / Product Characteristics

### 7.1 引脚拉力强度 / Lead Pull Strength

5 牛顿 10±1 秒 / 5N for 10±1 Seconds

### 7.2 引脚推力强度 / Lead Thrust Strength

2 牛顿 10±1 秒 / 2N for 10±1 Seconds

### 7.3 可焊性 / Solder ability



波峰焊/Wave : 260°C,  $\leq 3s$ ;

烙铁焊/Soldering Iron: 350 $\pm$ 10°C,  $\leq 3s$ .

#### 7.4 耐焊接热 / Soldering Heat Resistance

波峰焊/Wave : 260°C, 10s;

烙铁焊/Soldering Iron: 350°C, 5s.

### 8. 电气特性 / Electrical Characteristics

#### 8.1 实验条件: Test Condition

所有测试环境温度为 25 $\pm$ 5°C。

All electrical test is to be conducted with the ambient air at a temperature of 25 $\pm$ 5°C.

#### 8.2 负载能力 / Load capacity:

当保险丝通过 100%的额定电流时, 在 4 小时内不应熔断。

When the fuse loads through 100% of rated current, should blow within 4 hours.

#### 8.3 分断能力 / Interrupting Rating:

保险丝承受分断能力: 在 350 伏交流电源下, 可达 50 安培。

Breaking Capacity: 50A at 350V AC.

#### 8.4 温度上升试验 / Rising Temperature Test:

通 1.0 倍额定电流, 当温度稳定时 (5 分钟测量 4 次, 且每次测量值与平均值相差不超过 2°C)。测得熔断体任何部位的温升不得超过 75°C, 周围环境温度为 25 $\pm$ 5°C。

When the 100% times of Ampere Rating passes the fuse, after reaching thermal balance, the temperature on the fuse surface rising shall not be higher than 75°C. Note: Rising temperature = the Surface temperature - Ambient temperature.

#### 8.5 熔断时限 / Operating Characteristics



额定电流的% % of Ampere Rating(In)	熔断时间 Blowing Time
100% * In	大于 4 小时(4 hours Min)
200% * In	小于 60 秒 (60 sec Max)

## 9. 环境特性 / Environmental Characteristic

### 9.1 使用温度范围 / Operating Temperature

-55℃~+125℃。

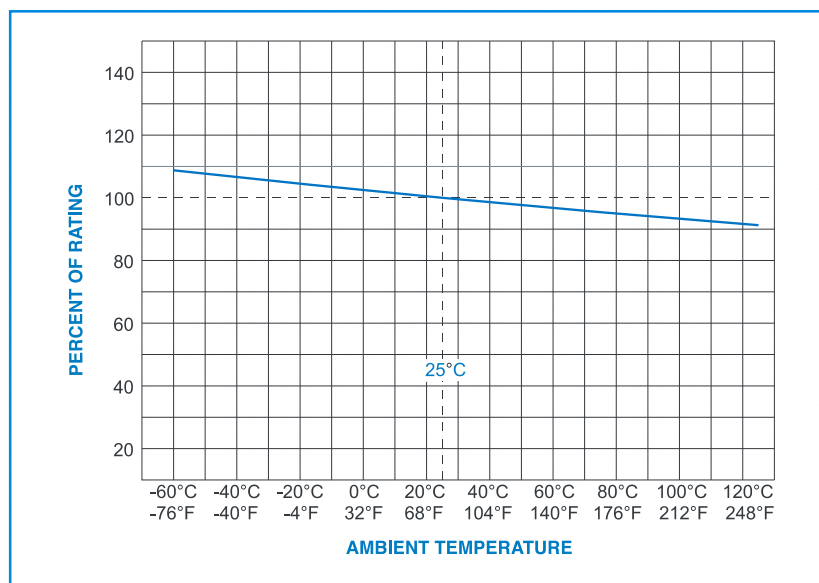
### 9.2 保存条件 Stock Condition

湿度：相对湿度 $\leq$ 75%平均可以存放3年。

Humidity: Relative humidity  $\leq$  75% store 3 years in average.

### 9.3 若操作环境温度超出 25 $\pm$ 5℃范围，在选用保险丝规格时，需考虑操作环境温度对保险丝的影响，请参照如下：温度-电流曲线图。

When choosing the fuse's specification, if the operating environmental temperature beyond the scope from 20~30℃, engineer should consider the environmental temperature's affection to fuses. Please refer: Temperature Rerating Curve:







## 10. 安装建议 / Installation Recommendations

### 10.1 建议焊接参数 / Recommended Soldering Parameters

#### A. 波峰焊参数 / Wave Parameters:

锡炉温度 / Solder Pot Temperature: 260°C Max

焊接时间 / Solder Dwell Time: 2~5s

#### B. 手工焊参数 / Hand-Solder Parameters:

烙铁温度 / Solder Iron Temperature: 350±5°C

焊接时间 / Heating Time: 5s Max

## 11. 包装 / Packaging

### 11.1 包装袋/盒印明下列标示: / The following items indicated on the label:

产品料号、额定(电压、电流)、分断类型及安规名称。

Catalog number, ratings (voltage, current), interrupting type and safety mark.

包装材料均符合 RoHS/REACH/HF 的环保要求, 且包装材料不会和零件发生化学反应, 造成不良。

The packing material conforms to ROHS/REACH/HF environmental protection request. And the packing materials will not have the chemical reaction with the components.

### 11.2 包装数量 / Packing Quantity

#### A. 散装 / Bulk packing:

每胶袋 500PCS / Bulk 500 pcs in per poly bag;

每 10 胶袋 1 个内盒 / 10 poly bags in per inner box;

每 4 个内盒 1 个外箱 / 4 inner boxes in per outer carton

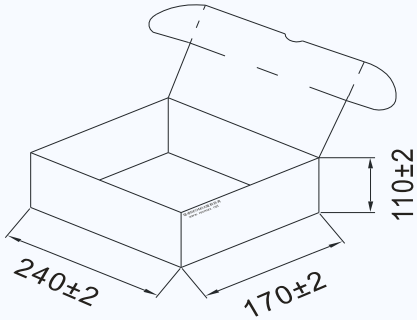
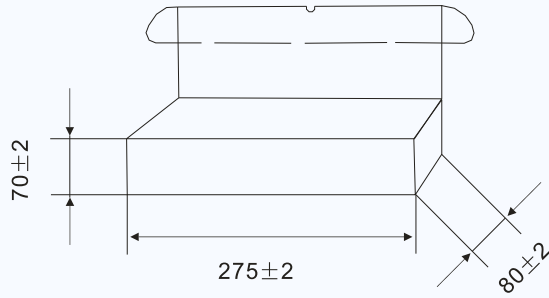
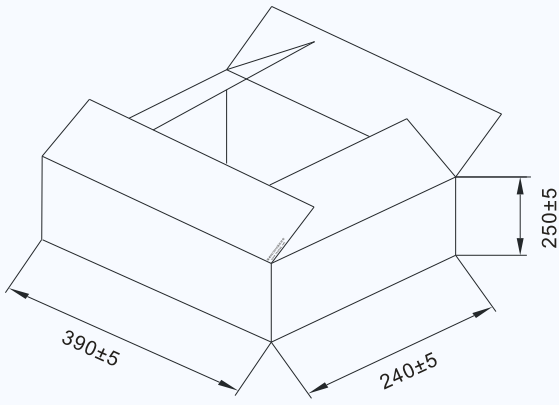
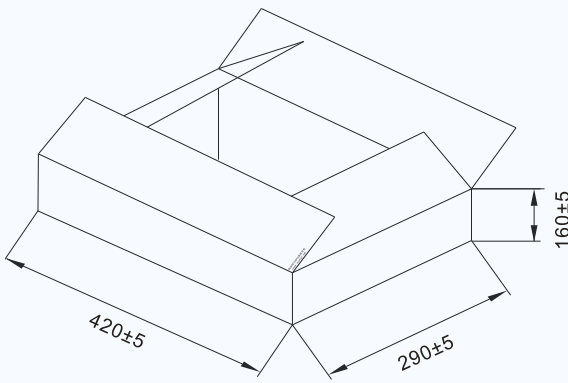
#### B. 编带包装/ Taped packing:

每个内盒 3000PCS / 3000 pcs per inner box

每 10 个内盒 1 个外箱 / 10 inner boxes per outer carton

### 11.3 包装箱尺寸 / Packing Size

单位: 毫米 / Unit: mm

散装内盒 Inner box of packing type A:	编带内盒 Inner box of packing type B:
L240±2 * W170±2 * H110±2	L275±2 * W80±2 * H70±2
 <p>Diagram showing the dimensions of the inner box for packing type A: Length 240±2 mm, Width 170±2 mm, and Height 110±2 mm.</p>	 <p>Diagram showing the dimensions of the inner box for packing type B: Length 275±2 mm, Width 80±2 mm, and Height 70±2 mm.</p>
散装外箱 Outer carton of packing type A	编带外箱 Outer carton of packing type B
L390±5 * W240±5 * H250±5	L420±5 * W290±5 * H160±5
 <p>Diagram showing the dimensions of the outer carton for packing type A: Length 390±5 mm, Width 240±5 mm, and Height 250±5 mm.</p>	 <p>Diagram showing the dimensions of the outer carton for packing type B: Length 420±5 mm, Width 290±5 mm, and Height 160±5 mm.</p>

## 12. 其他 / Others

12.1 如果在使用中有超出本规格书的要求, 须经双方协商确认。

In the event that an impropriety is found beyond this specification, it shall be fixed by mutual agreement between the parties.



12.2 如果本规格书有不适当的情况，须通过双方协商并由本公司修改。

In the event that an impropriety is found in this specification, *REOMAX ELECTRONICS CO., LTD.* shall amend it by mutual agreement between the parties.

**附件 I: 安规证书 / Appendix I: Safety approval certificates**